








AGM High Rate Battery

Discover® VRLA AGM High Rate batteries are dependable and delivers consistent power in backup for UPS and critical power applications. The batteries are maintenance-free, no-gassing, nonspillable and ideal for use in sensitive areas.



TERMINAL



LAYOUT

MECHANICAL SPECIFICATIONS

Length A (in/mm)	10.2	260
Width B (in/mm)	6.7	169
Height C (in/mm)	8.2	208
Total Height D (in/mm)	8.3	212
Weight (lbs/kgs)	53	24
Terminal *	F11M6	
Technology	AGM, VRLA	

NOTE 1: Dimensions have a ± 2 mm (0.08 in) tolerance. Weights may vary.

NOTE 2: Refer to [terminal guide](#) on website for torque values.

ELECTRICAL SPECIFICATIONS

Voltage (V)	12
Internal Resistance (m Ω)	5
Short Circuit (A) (20°C / 68°F)	1770
Self-Discharge (20°C / 68°F)	2-3% per month
Charge Temperature	Min: -10°C (14°F) Max: 50°C (122°F)
Discharge Temperature	Min: -40°C (-40°F) Max: 50°C (122°F)
Storage Temperature	-20°C (-4°F) to 60°C (140°F)

NOTE 3: Extra considerations must be given when designing systems for use at maximum temperatures.

NOTE 4: Internal Resistance is approximate.

PERFORMANCE SPECIFICATIONS

Amp Hours (AH)				
15 MIN	1 HR	5 HR	10 HR	20 HR
40	56	67	75	78

15MIN @ 1.67VPC; 1HR @ 1.60VPC; 5HR @ 1.75VPC; 10 HR@ 1.80VPC; 20 HR @ 1.80VPC. All at 30°C/86°F

Discharge Constant Current (Amperes) @ 25°C / 77°F									
VPC/Time	5 MIN	10 MIN	15 MIN	30 MIN	1 HR	3 HR	5 HR	10 HR	20 HR
1.60 VPC	305.00	215.00	170.00	99.00	56.00	22.50	14.50	7.90	4.15
1.65 VPC	289.00	206.00	165.00	96.00	55.00	21.80	14.20	7.80	4.10
1.70 VPC	275.00	196.00	155.00	93.00	54.00	21.00	13.80	7.70	4.05
1.75 VPC	269.00	186.00	149.00	90.00	53.00	20.20	13.40	7.60	4.00
1.80 VPC	255.00	175.00	141.00	86.50	51.80	19.30	13.00	7.45	3.90

Discharge Constant Power (Watts) @ 25°C / 77°F									
VPC/Time	5 MIN	10 MIN	15 MIN	30 MIN	45 MIN	1 HR	2 HR	3 HR	5 HR
1.60 VPC	518.00	387.00	316.00	190.00	137.00	109.00	60.80	43.80	32.10
1.65 VPC	512.00	372.00	306.00	183.50	133.50	106.50	59.30	42.90	31.30
1.70 VPC	502.00	357.00	296.00	177.50	130.00	104.00	57.50	41.80	30.50
1.75 VPC	496.00	343.00	286.00	171.00	126.00	101.50	55.70	40.80	29.70

BENEFITS

ENHANCED RUNTIME

- Consistent amp hour capacity over lifetime
- Superior high-rate discharge performance

EXTENDED SERVICE LIFE

- Up to 12 year design life
- Low self-discharge rates prolongs shelf life
- 99% gas recombination extends life

EXTREME TEMPERATURES

- Wide ambient operating temperature
- Low temperature operation superior to FLA / Gel batteries

RELIABLE AND SAFE

- Valve Regulated Lead-Acid, AGM
- Maintenance-free, nonspillable, no-gassing
- Flame retardant (UL94:V0) ABS case and cover available

CERTIFIED QUALITY

Discover® manufacturing facilities are fully certified to ISO 9001/14001 and OSHA 18001 standards.

Designed in accordance with and published in compliance with applicable standards, including:


- IEC 60896-21/22
- BS EN 60254-1:2005
- UL, CE Health Safety Certified

SHIPPING CLASSIFICATION


- Classified as a nonspillable battery
- Without restriction for transport by Sea (IMDG amendment 27)
- Without restriction for transport by Air (IATA/ICAO provision 67)
- Without restriction for transport by Ground (STB, DOT-CFR-HMR49)

1.80 VPC	480.00	328.00	274.00	164.00	122.00	—	53.90	39.70	28.90	
----------	--------	--------	--------	--------	--------	---	-------	-------	-------	--


Temperature Effects on Float Life

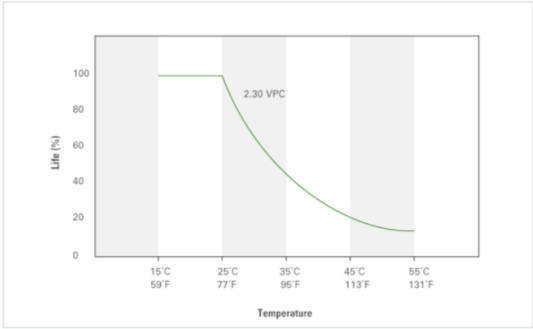


Temperature Effects on Capacity

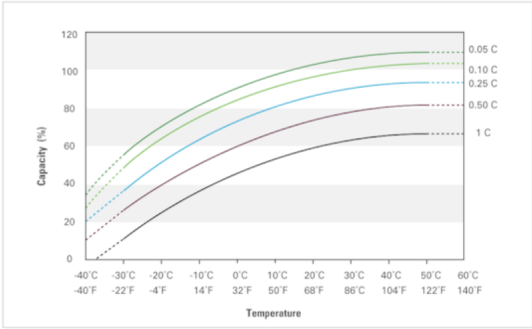

Charge Characteristics

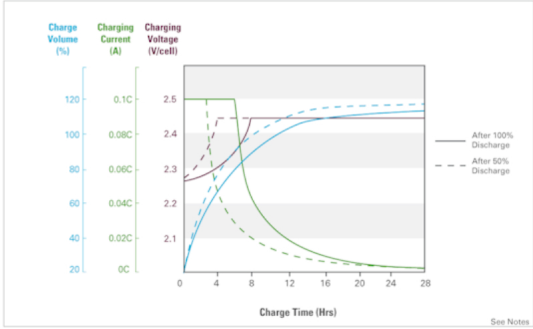

Discharge Characteristics

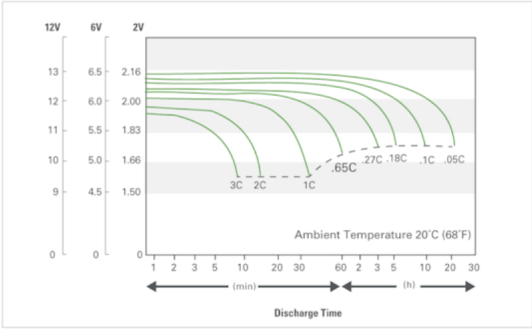

Self-Discharge Characteristics



NOTES

- 1Due to self-discharge characteristics of lead acid battery technologies, batteries should be charged within 6 months of storage to ensure optimum performance, prevent sulphation and permanent capacity loss.
- 2Charge profile recommendations correspond to battery voltages at 25°C (77°F). For temperatures below, adjust +5mVPC/°C (+3mVPC/°F). Temperatures above, adjust -5mVPC/°C (-3mVPC/°F). Temperature compensated charging helps ensure optimum battery runtime and life performance.
- 3Charge until battery voltage reaches 2.45VPC and hold until current tapers down to 0.01C20 amps. Battery is fully charged under these conditions and charger should be disconnected or switched to "float" voltage. For standby / float use, a constant charge voltage of 2.25-2.30VPC is also acceptable. Hold until the battery seeks its own current level and maintain itself in a fully charged condition.

Discover® reserves the right to make adjustments to this publication at any time, without notice or obligation. Data in this publication are for reference use only and models may vary from shown. It is the responsibility of the reader of this information to verify any and all information presented herein. For more information contact us at info@discoverbattery.com