



CBHF1-SM

Main features:


Compact & lightweight

Power from 48W up to 290W

Current from 4A to 12A

APPLICATIONS



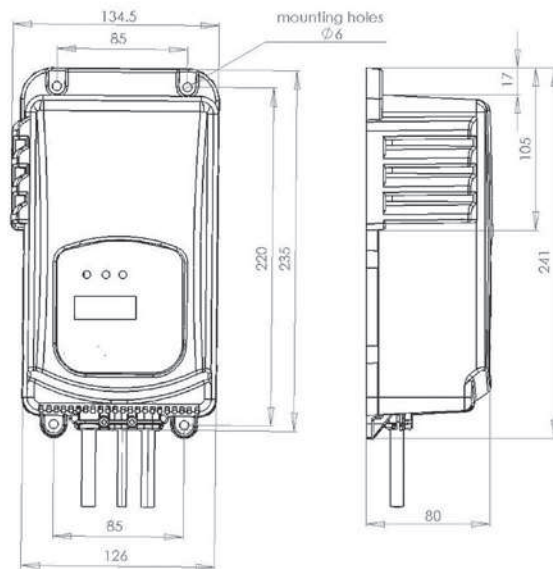

DIMENSIONS (LxWxH): 134,5x241x80 mm – 5.30x9.49x3.15 in

WEIGHT: 1,80 Kg – 3.97 lbs

PROTECTION GRADE IP30

INPUT VOLTAGE: 208 ÷ 240 Vac – 50-60 Hz

| Battery Voltage | Battery Range | | Charging Current | Model |
|-----------------|---------------|--------------|------------------|-------|
| | 5h | 20h | | |
| 12V | 20 ÷ 40 Ah | 30 ÷ 50 Ah | 4A | 12-4 |
| | 40 ÷ 80 Ah | 60 ÷ 105 Ah | 8A | 12-8 |
| | 60 ÷ 100 Ah | 70 ÷ 130 Ah | 10A | 12-10 |
| | 90 ÷ 120 Ah | 120 ÷ 160 Ah | 12A | 12-12 |
| 24V | 20 ÷ 40 Ah | 30 ÷ 50 Ah | 4A | 24-4 |
| | 40 ÷ 80 Ah | 60 ÷ 105 Ah | 8A | 24-8 |
| | 60 ÷ 100 Ah | 70 ÷ 130 Ah | 10A | 24-10 |
| | 90 ÷ 120 Ah | 120 ÷ 160 Ah | 12A | 24-12 |

